



LIGHTING FIXTURE MFG.

Vapor Tite 2'

For Wet and Damp Locations

Description

V&J Lighting Fixture offers the finest manufactured Gasketed Enclosures, which are totally dust and moisture resistant. The enclosure is constructed of a fiberglass upper body and an acrylic, crepe pattern diffuser securely positioned in a permanent poured in place sealing gasket. The diffuser and upper components are locked into place by retaining latches, assuring a secure, tight seal.

The Gasketed Enclosure is a U.L. recognized component, certified by the NSF International and has the CSA Component acceptance mark.

By installing a U.L. listed fluorescent strip light or channel type lighting fixture into the Sentry Series Gasketed Enclosure and submitting the entire unit to Underwriters Laboratories, a U.L. Listed fixture suitable for use in wet or damp locations can be realized.


Approvals and/or Listings

Underwriters Laboratories
NSF International
U.S. Department of Agriculture
Canadian Standards Association



Applications

Food Processing Facilities
Kitchens
Parking Garages
Car Washes
Schools
Government Facilities
Industrial Facilities
Public Areas

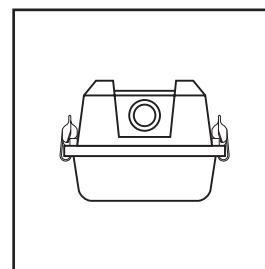

Features:

STRUCTURALLY RIGID FIBERGLASS BODY

Fiberglass is reinforced polyester and self-extinguishing (ASTM D635-74). This type of construction does not allow the body to flex during handling and installation.

GASKETED DIFFUSER RETENTION SLOT

The gasketed inverted U-slot provides a positive continuous seal between body and diffuser.

BRASS FIXTURE MOUNTING STUD

The fixture studs are integrally molded into the body to facilitate lighting fixture installation.

HIGH IMPACT ACRYLIC/DR DIFFUSER

Internal crepe pattern allows a smooth exterior surface for ease of cleaning.


DIFFUSER

The diffuser flange fits snugly into the gasketed retention slot forming a continuous seal.




2 Foot Enclosure

Shallow Unit

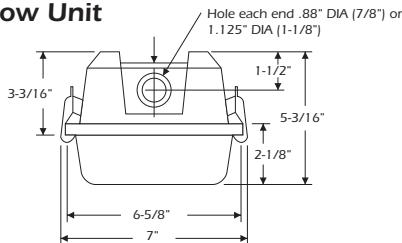

External Top View

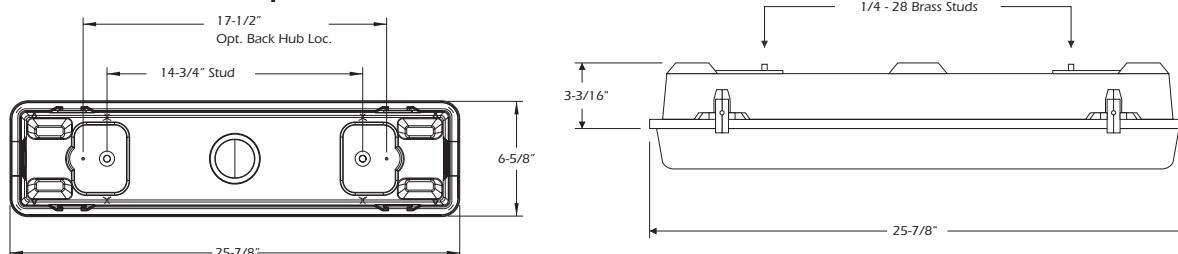

Note: Brass Studs on Inside of Unit are 10-32

Catalog No.	Lamps	Voltage	Length	Type
F-VT120	1 T12	120V	24"	Bi-pin
F-VT220	2 T12	120V	24"	Bi-pin
F-VT220-EMG	2 T12 (Emergency)	120V-277V	24"	Bi-pin